

The using document instructions of Device Manage

1. Installation steps:




General_DeviceManage
_V2.5.0.6.R.20140305
.exe


- 1) Find in the disc and double-click `General_DeviceManage_V2.5.0.6.R.20140305.exe` file, pop up the dialog box shown in the diagram below.




- 2) Click "next", pop up the dialog box shown in the diagram below.

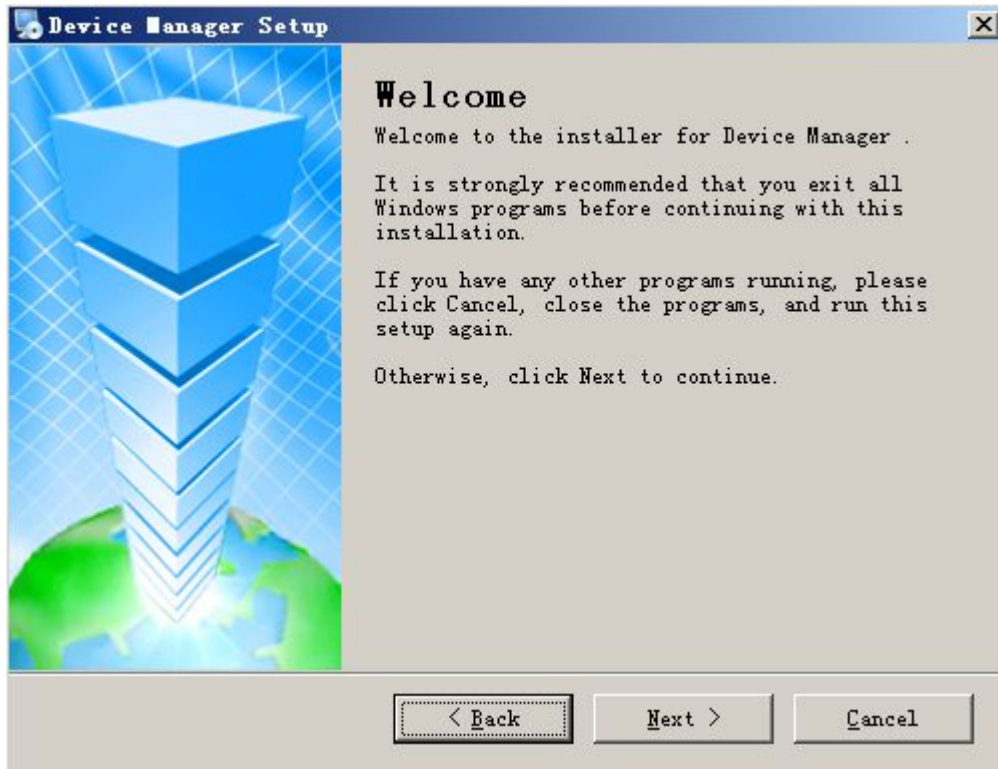


3) Click “next”, pop up the dialog box shown in the diagram below.

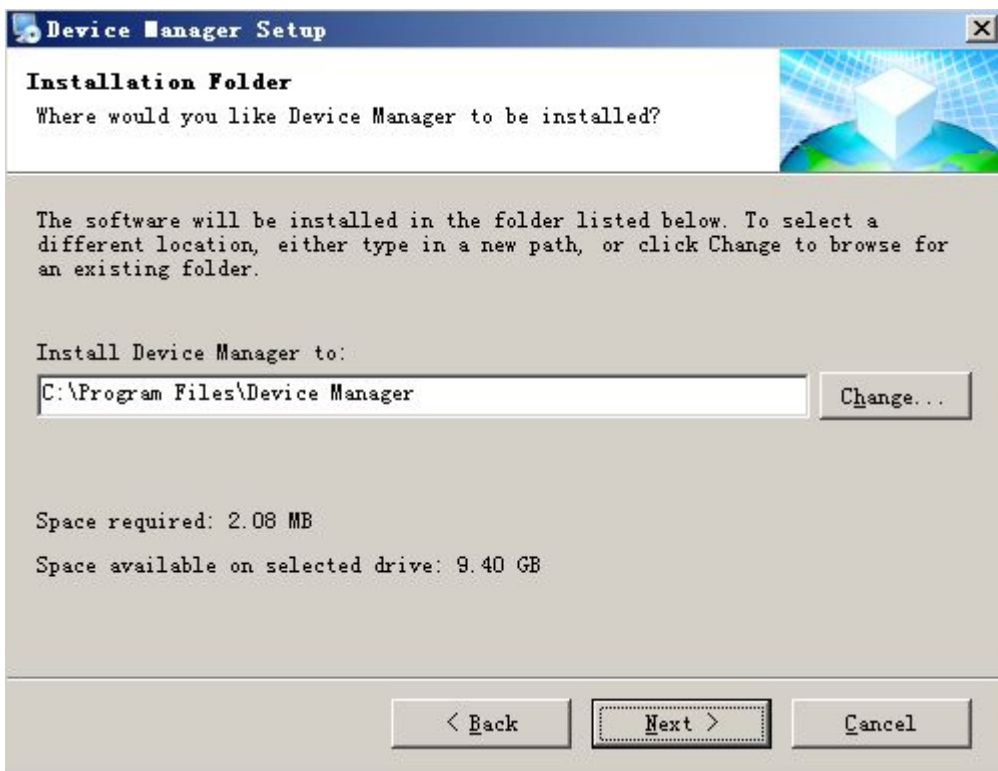


4) Press the “change” button, , select the installation pat, the system default folder is “C:\Program Files\Device Manager”, Click “next”, pop up the dialog box shown in the diagram below.

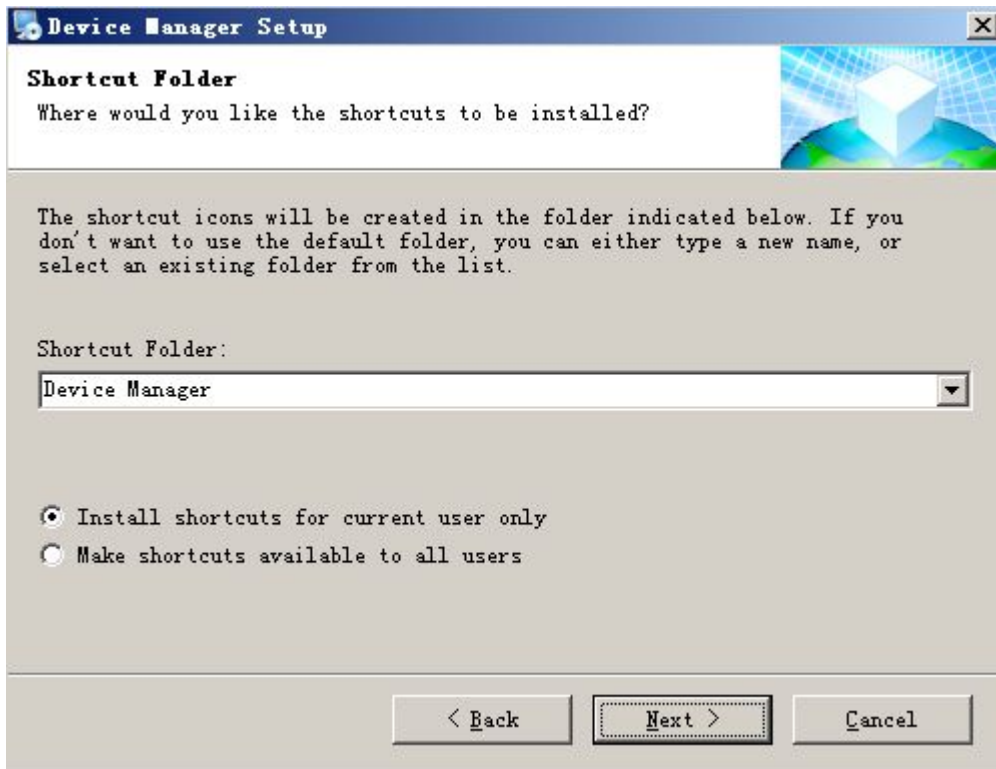

- 5) Input the user message, click “next”, start to install Player, pop up the dialog box shown in the diagram below.

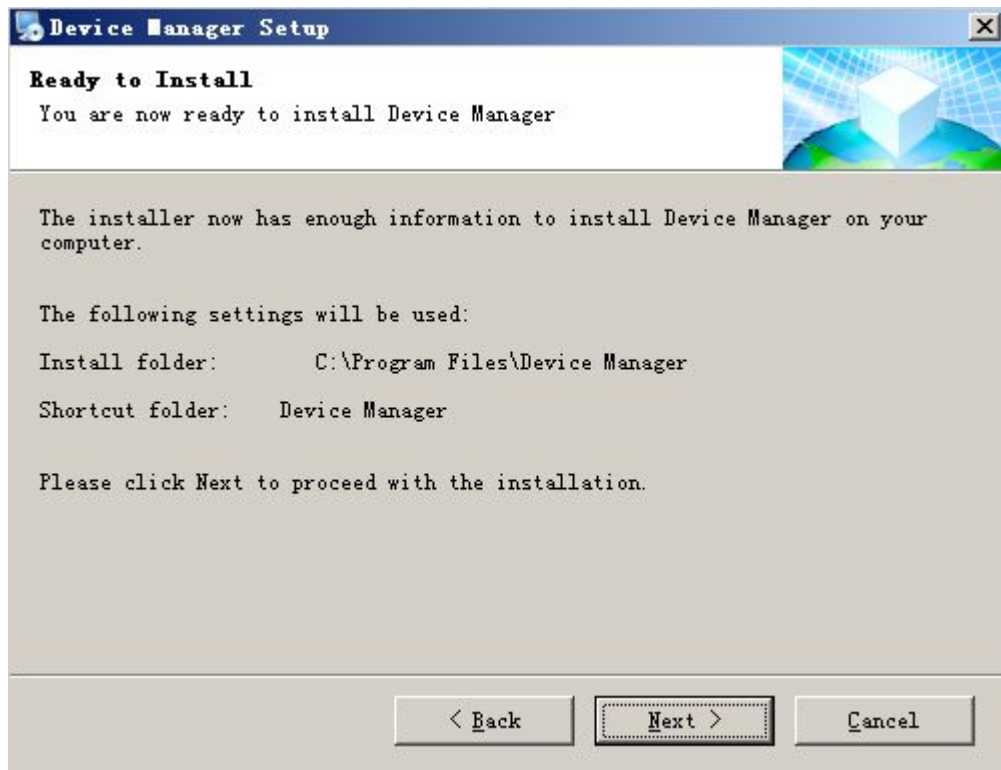

- 6) Click “next”, pop up the dialog box shown in the diagram below.

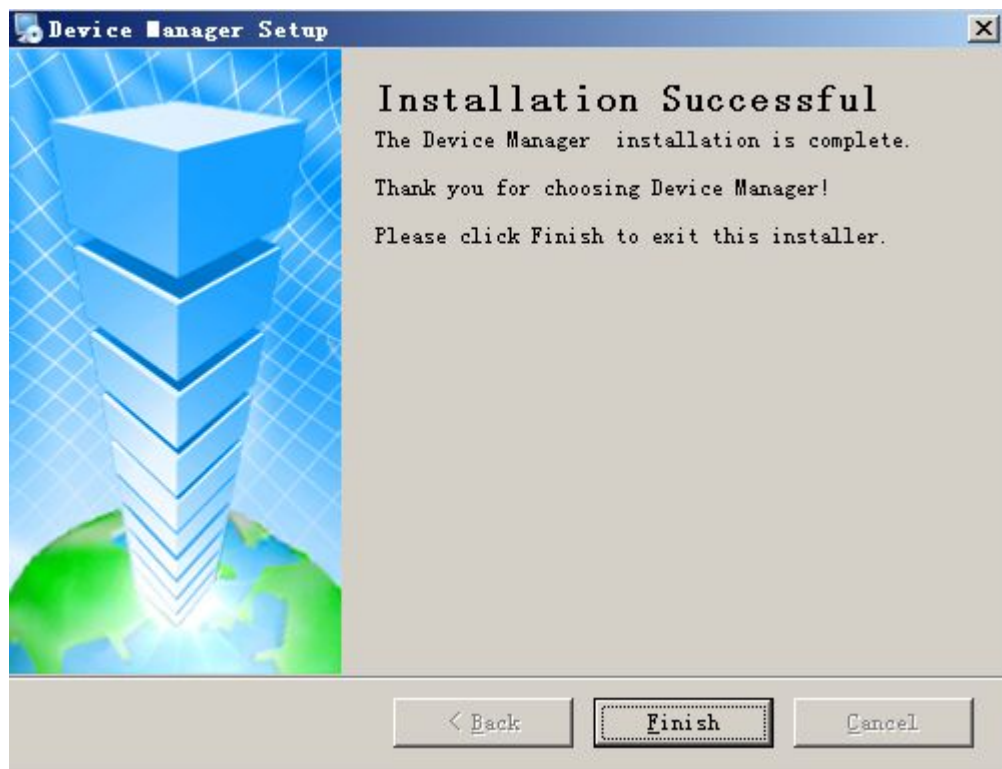


- 7) Click “finish” button to complete the installation. At this moment, the desktop will appear the


following icon



2. Device Manager interface is as follows:

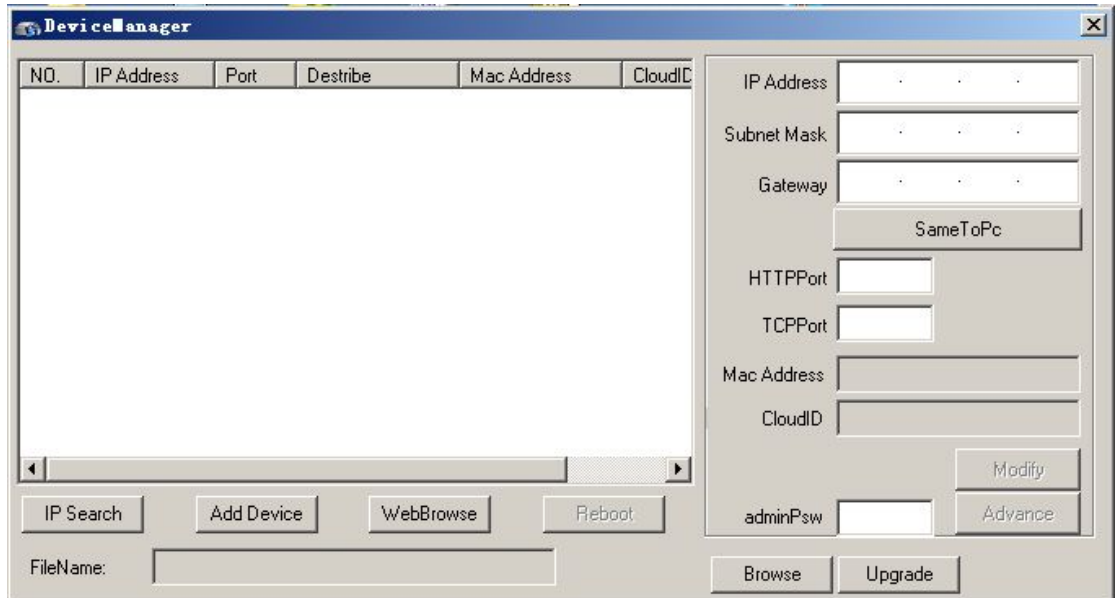

1) Search device

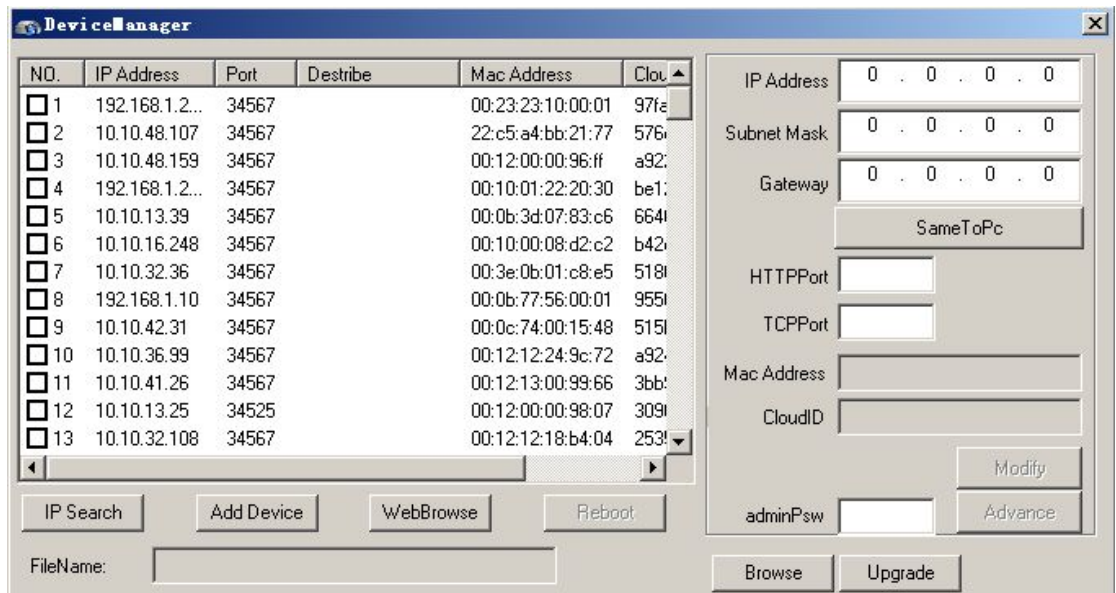

2) Modify the network parameters: select a device, in the action bar on the right can modify the network parameters of the IP address, subnet mask, default gateway, HTTP port, TCP port, then the network parameters of the device modified successfully; click


on the “consistent with the local PC” can make the subnet mask and default gateway fit to the PC.

IP Address	10 . 10 . 47 . 45
Subnet Mask	255 . 255 . 240 . 0
Gateway	10 . 10 . 32 . 1
	SameToPc
HTTPPort	80
TCPPort	34567
Mac Address	00:0b:3d:87:ab:01
CloudID	8bb76c2d0c4b9394
	Modify
adminPsw	
	Advance

3) Advanced; configure the DNS, mobile phone monitoring enabled, DDNS, WIFI, etc.

Advance	
DNS1	202 . 101 . 172 . 37
DNS2	202 . 101 . 173 . 157 SameToPc
PhoneInfo	
Enable	<input checked="" type="checkbox"/>
Port	34599
DDNS	
DDNSType	CN99 Regsiter
Enable	<input type="checkbox"/>
DomainName	your.3322.org
DDNSName	
Passwd	
Wifi	Setting
	Save Cancel

4) Device upgrade firmware: select the device needs to upgrade, click the “browse” button (generally the suffix for upgrade firmware is) select the firmware needs to upgrade, click the “upgrade” button.

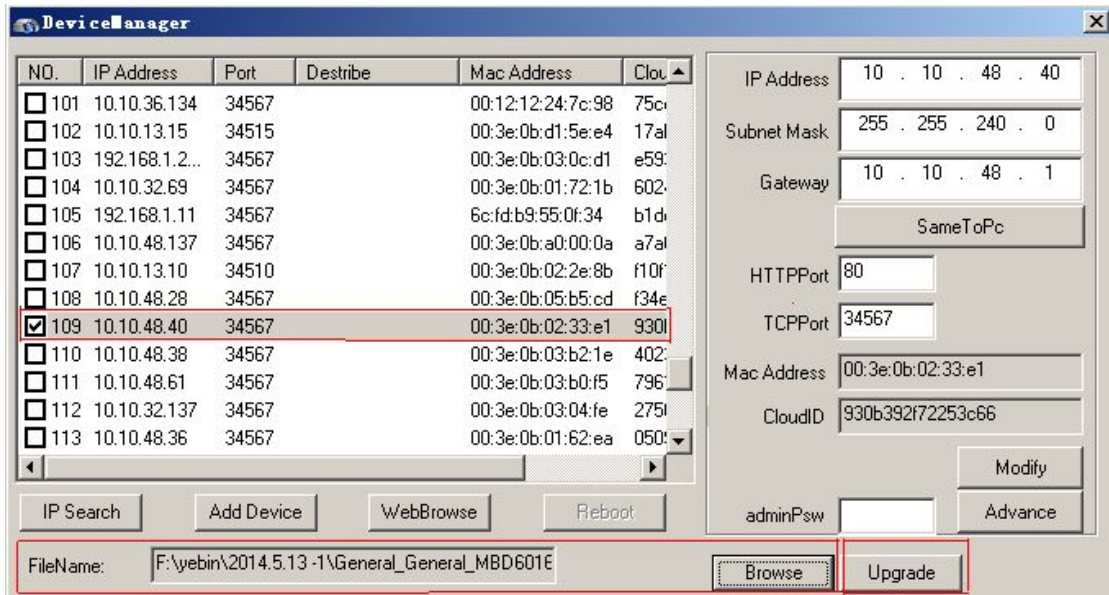

5) Other interface button

Add device: input the IP address, port, user name and password of the device can add device manually.

Web access: select the corresponding device, click on the web access, can access to the device directly through IE.

Restart device: select the device needs to restart, click on the restart device button, the corresponding device is started.

: